

PRAGMA
INNOVATIONS

ARVIGOnano 3



Quick Start Guide QSC®

1 ARVIGOnano Setup

1.1 Software Overview


Find ARVIGOnano in network, connect and disconnect.

Retrieve ARVIGOnano settings.

Send settings to ARVIGOnano.

Define ARVIGO IP Address.
(Default: DHCP)

Define DSP IP.

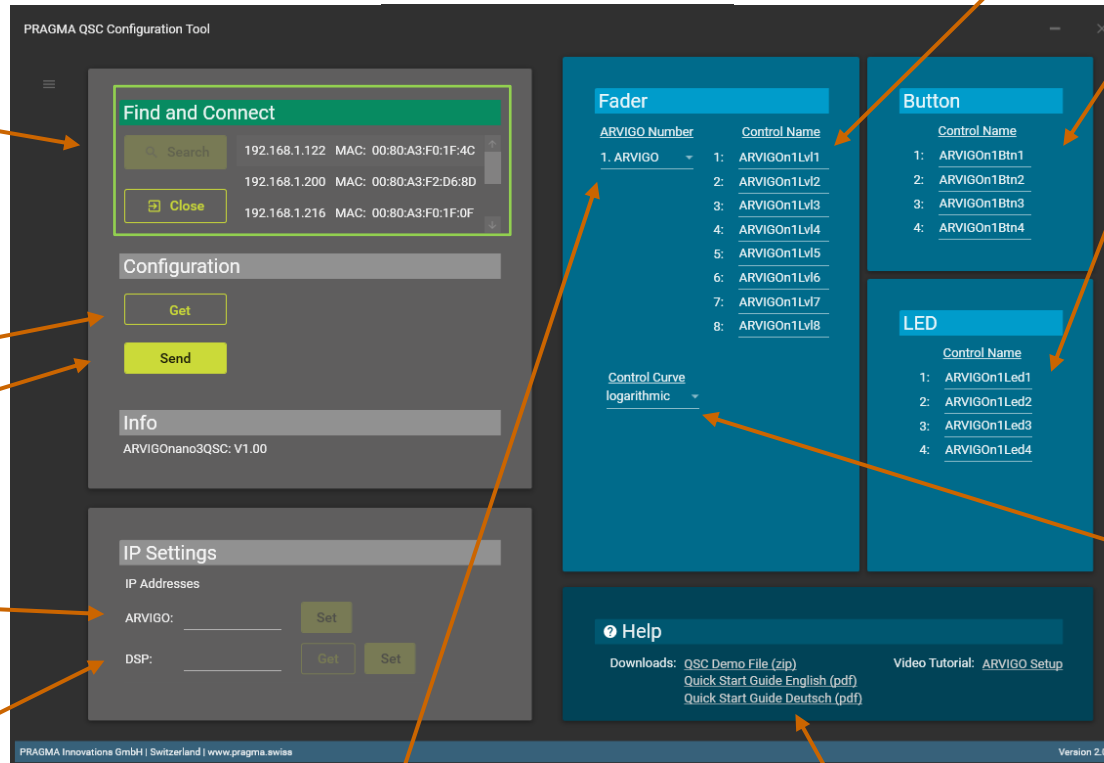

QSC "named Control IDs"


Select between logarithmic and linear fader curve.

Technical support

If more than one ARVIGOnano is connected to a DSP, pre-defined Control Names can be switched here (Fader/Button/LED).

1.2 ARVIGOnano configuration


- a. Click on the “**Search**” button to search your network for connected ARVIGOnano’s.
- b. Select the desired IP address in the Find-field and connect to the ARVIGOnano by clicking on the „**Open**” button.
- c. By clicking the „**Get**” button you will retrieve the values saved in the ARVIGOnano (auto get values after connection is established).
- d. Define the desired parameters.
- e. Press „**Send**” in order to save settings in ARVIGOnano.
- f. Assign new IP address to ARVIGOnano (Default: DHCP).
- g. Define and retrieve configured IP address of remote DSP.

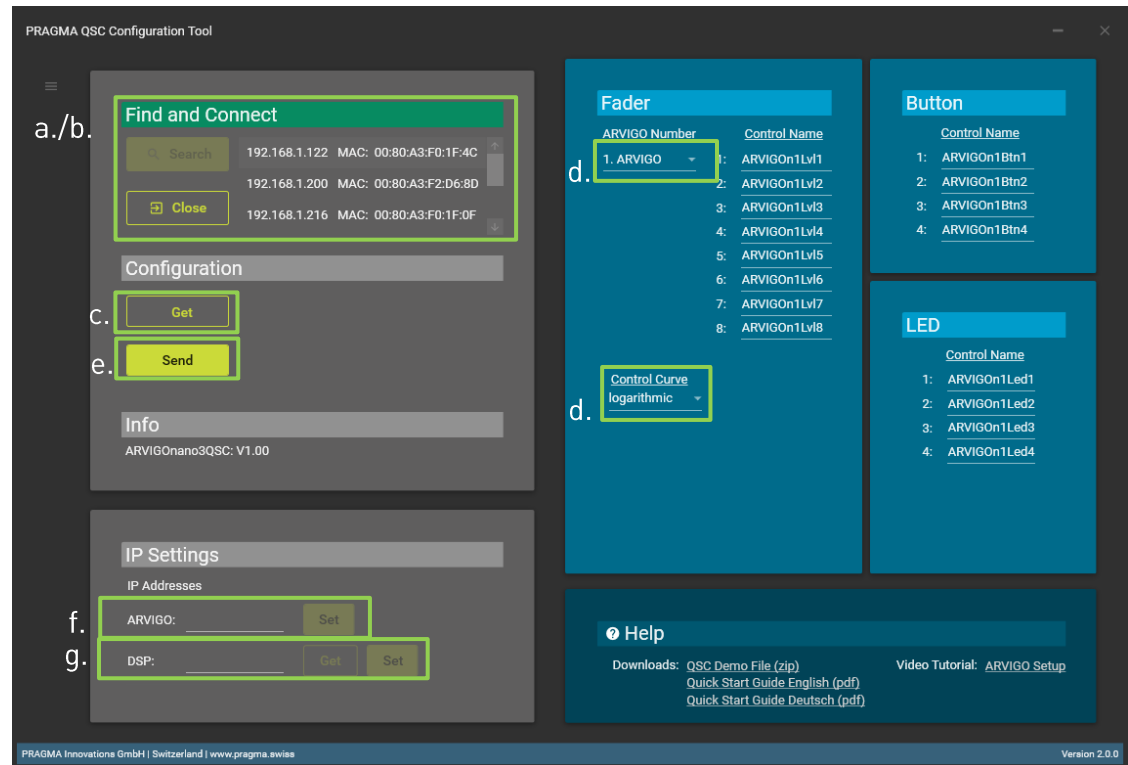


2 Setup DSP

2.1 Q-SYS Designer


1. Put for each of the 8 faders (single mode) a **single Gain** block in your design. Assign each block a named-control ID which corresponds to the ARVIGOnano setup (**default:** ARVIGOn1Lv1, ARVIGOn1Lv2..).

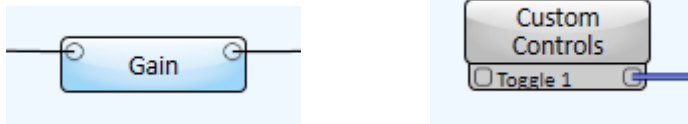

2. Put for each button a **Custom Controls Momentary Button** block in your design. Assign each block a named-control ID which corresponds to the ARVIGOnano setup (**default:** ARVIGOn1Btn1, ARVIGOn1Btn2...).



3. Put for all five LED one **4 Custom Controls LED** block in your design. Assign each block a named-control ID which corresponds to the ARVIGOnano setup (**default:** ARVIGOn1Led1, ARVIGOn1Led2...).



3 EC Declaration



EC Declaration of Conformity

PRAGMA Innovations GmbH, as manufacturer having sole responsibility, hereby declares that our delivered version the following described product complies with the applicable provisions of the DIRECTIVES below except as noted herein. Any alterations to the product not agreed upon and directed by PRAGMA Innovations GmbH will invalidate this declaration.

Brand Name: ARVIGO
Product Description: Remote Audio Controls for Networked Audio DSP Platform.
Models: ARVIGOnano, ARVIGOnano R8, ARVIGOnano R12,
ARVIGOnano R16, ARVIGOnano R20

Applicable EC Directives:

- LVD Directive (2006/95/EC)
- EMC Directive (2004/108/EC)
- RoHS Directive (2011/65/EU)

Special Considerations for Product Environment or Compliance:

- Use only PoE Insertion Devices that are CE Marked, certified to local regulations, and appropriately rated Type 1 PoE or Type 2 PoE Plus (IEEE 802.3at).
- Shielded cabling must be used for system connections.

Manufacturer, Location and Contact:

PRAGMA Innovations GmbH
Büchnerstrasse 17
8006 Zürich, Switzerland
info@pragmainnovations.ch